


Jan Negoce

Tel 0661 52 99 88

Email contact@jannegoce.com

Minibar Series Interlocks Fixed foot

Electronic refrigerator cooling principle

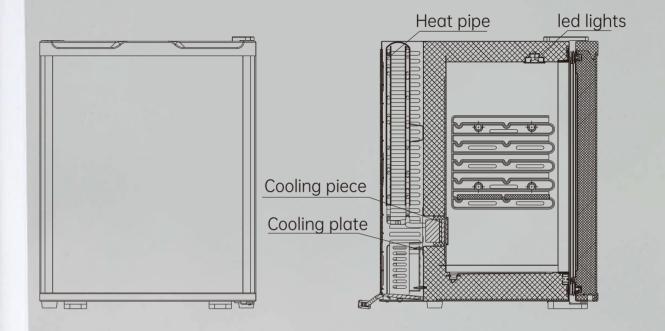

Electronic refrigerator uses semiconductor thermoelectric refrigeration technology for refrigeration

The electronic refrigerator uses the power board to convert the external AC power into 12V DC power to the cooling plate (semiconductor) to make it work. The cooling plate is cooled while heating, while the cold surface conducts and stores the cold through the metal aluminum and stores it in the refrigerator. The temperature in the refrigerator is far lower than the temperature of the air in the refrigerator, so that the temperature in the refrigerator can be gradually reduced, and the heat surface achieves the purpose of cooling. The heat is dissipated through the circulation of the refrigerant in the condenser (heat pipe).



Mute



Environmental protection



Energy saving



practical

Fully silent electronic refrigerator

Features

No compressor, no noise, no vibration.

No freon, no refrigerant, green and environmental-friendly.

No rotating parts, long service life.

Fuzzy temperature control, green energy saving.

11111

The automatic condensation water evaporation device is safe and reliable. Built-in soft LED light.

CB-18GSR Features ▶ Product Dimension(mm): 385*300*485(WDH) ▶ Packing Dimension(mm): 440*345*530(WDH) ▶ Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz Cooling performance: 5-8°C ▷ Capacity(L): 18 ▶ Net Weight(kg): 8.2 ▶ Gross Weight(kg): 9.1 ▷ Configuration: Foam door ▷ Colour: Black, White, Brown CB-21GSD(Drawer) Features ▶ Product Dimension(mm): 385*455*375(WDH) ▶ Packing Dimension(mm): 460*510*430(WDH) > Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz

▷ Capacity(L): 21

Colour: Black

▶ Net Weight(kg): 9.4

▷ Gross Weight(kg): 10.5

▷ Configuration: Foam door

⊳ Cooling performance: 5-8°C



Fully silent electronic refrigerator CB/SC-20GSR





CB-20GSR

SC-20GSR

Feature











Model	CB-20GSR	SC-20GSR
Product Dimension(mm)	360 *390 *430 (WDH)	360 *390 *440 (WDH)
Packing Dimension(mm)	415 *450 *480 (WDH)	415 *450 *480 (WDH)
Voltage	AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz	
Cooling performance	5-8°C	5-8℃
Capacity(L)	20	20
Net Weight(kg)	8.5	10
Gross Weight(kg)	9.5	11
Configuration	Foam door	Glass door
Colour		

Fully silent electronic refrigerator CB/SC-28GSR



Fully silent electronic refrigerator CB/SC-30GSR









SC-30GSR

CB-28GSR

SC-28GSR

Feature















Model	CB-28GSR	SC-28GSR
Product Dimension(mm)	385 *385 *485 (WDH)	385 *385 *495 (WDH)
Packing Dimension(mm)	440 *440 *530 (WDH)	440 *440 *540 (WDH)
Voltage	AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz	
Cooling performance	5-8℃	5-8°C
Capacity(L)	28	28
Net Weight(kg)	9.4	11.0
Gross Weight(kg)	10.4	12.0
Configuration	Foam door	Glass door
Colour		

CB-30GSR

Feature











SC-30GSR CB-30GSR Model Product Dimension(mm) 385 *420 *475 (WDH) 385 *420 *485 (WDH) 440 *475 *530 (WDH) 440 *460 *615 (WDH) Packing Dimension(mm) AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz Voltage 5-8°C 5-8°C Cooling performance 30 30 Capacity(L) 10.1 12.3 Net Weight(kg) 11.2 13.3 Gross Weight(kg) Foam door Glass door Configuration Colour

Fully silent electronic refrigerator CB/SC-35GSR



Fully silent electronic refrigerator CB/SC-40GSR







CB-35GSR

SC-35GSR

CB-40GSR

SC-40GSR

Feature















M1 - 1	CD ZECCD	CC 7ECCD
Model	CB-35GSR	SC-35GSR
Product Dimension(mm)	385 *455 *485 (WDH)	385 *455 *495 (WDH)
Packing Dimension(mm)	440 *510 *530 (WDH)	440 *510 *530 (WDH)
Voltage	AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz	
Cooling performance	5-8°C	5-8°C
Capacity(L)	35	35
Net Weight(kg)	10.5	13.5
Gross Weight(kg)	11.6	14.6
Configuration	Foam door	Glass door
Colour		

Feature












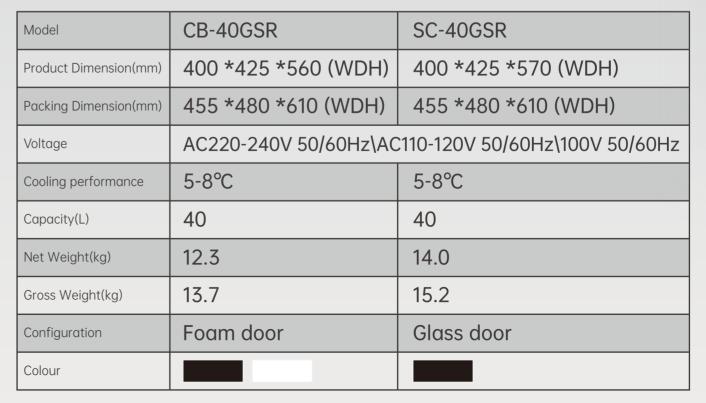

Wall-mounted electronic refrigerator

Features

No compressor, no noise, no vibration.

No freon, no refrigerant, green and environmental protection.

No rotating parts, long service life.

Fuzzy temperature control, green energy saving.

The automatic condensation water evaporation device is safe and reliable.

Built-in soft LED light.





BCH-12(Wall-mounted)

▶ Product Dimension(mm): 402*222*523(WDH)

▶ Packing Dimension(mm): 465*295*605(WDH)

Voltage: 220-240V/50-60Hz (or 100-120V/50-60Hz)

▶ Cooling performance: 6-8°C

▷ Capacity(L): 12

▶ Net Weight(kg): 11.6

▷ Gross Weight(kg): 13.0

Description: Glass door

▶ Colour: Black, White, Wooden

Full silent electronic refrigerator-BCH series

Feature

- ▶ Product Dimension(mm): 430*480*510(WDH)
- ▶ Packing Dimension(mm): 460*510*540(WDH)
- Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz
- Cooling performance: 5-8°C
- ▷ Capacity(L): 46
- ▷ Net Weight(kg): 12.0
- ⊳ Gross Weight(kg): 13.2
- ▷ Configuration: Foam door
- ▷ Colour: Black,White,Wooden

BCH-65

BCH-48

Feature



- ▶ Product Dimension(mm): 475*450*650(WDH)
- ▶ Packing Dimension(mm): 535*505*680(WDH)
- Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz
- ⊳ Cooling performance: 5-8°C
- ▷ Capacity(L): 65
- ▶ Net Weight(kg): 15.5
- ⊳ Gross Weight(kg): 17.5
- ▷ Configuration: Foam door
- ▷ Colour: Black,White,Wooden

BCH-70

Feature




- ▶ Product Dimension(mm): 430*520*740(WDH)
- ▶ Packing Dimension(mm): 475*565*775(WDH)
- Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz
- ▶ Cooling performance: 3-8°C/12°C
- ▷ Capacity(L): 70
- ▶ Net Weight(kg): 18.0
- ▶ Gross Weight(kg): 20.8
- ▷ Configuration: Foam door/Glass door
- Colour: Black, White, Wooden



BC-35 Feature ▶ Product Dimension(mm): 405*440*552(WDH) ▶ Packing Dimension(mm): 455*495*590(WDH) ▶ Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz Cooling performance: 0-10°C ▷ Capacity(L): 35 ▶ Net Weight(kg): 15.6 ▷ Gross Weight(kg): 16.9 ▷ Configuration: Foam door ▷ Colour: Black, White BC-50 Feature ▶ Product Dimension(mm): 475*430*515(WDH) ▶ Packing Dimension(mm): 510*470*540(WDH) ▶ Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz Cooling performance: 3-10°C Capacity(L): 50 ▶ Net Weight(kg): 17.8 ▶ Gross Weight(kg): 18.6 De Configuration: Foam door ▷ Colour: Black, White


BC-65 Feature ▶ Product Dimension(mm): 474*450*635(WDH) ▶ Packing Dimension(mm): 535*505*680(WDH) ▶ Voltage: AC220-240V 50/60Hz\AC110-120V 50/60Hz\100V 50/60Hz ▷ Cooling performance: 0-10°C ▷ Capacity(L): 65 ▶ Net Weight(kg): 18.5 ⊳ Gross Weight(kg): 19.6 ▷ Configuration: Foam door ▷ Colour: Black, White

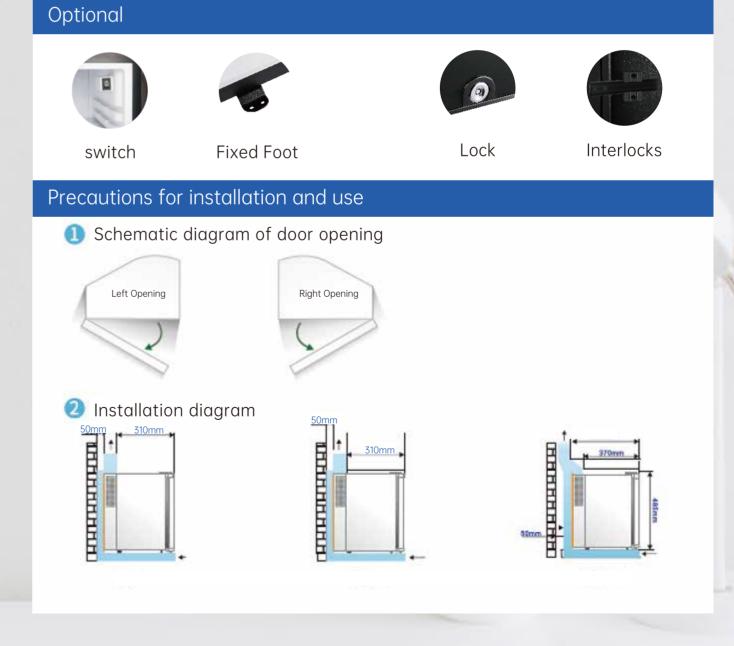

Intelligent Electronic Safe Series









Portable operation



Security enhancement



strong and sturdy

All steel builds intelligent password control

- Easy to use
- Large storage space
- Cold rolled steel plate
- All steel solid lock bolt



Thickening box material



All steel builds intelligent password control

Insist with the use of high-cost raw materials; micro-carbon alloy steel, strong and strong box.

Bold locking bolt

Using 16mm solid cylindrical lock bolt, made of pure steel, tightly fit, anti-theft and anti-prying.

Fully silent electronic refrigerator




GC right angle concave door series



Right angle concave door design.An anti-pry board is added behind the door panel, which is safely upgraded and has a more

Function configuration

LCD screen, acrylic electronic key panel Automatic electronic lock 3-6 guest password unpacking Unpacking the master password, unpacking the key Handheld decoder out of the box Wrong password lock Unpacking records inquiry 17-inch laptop can be stored

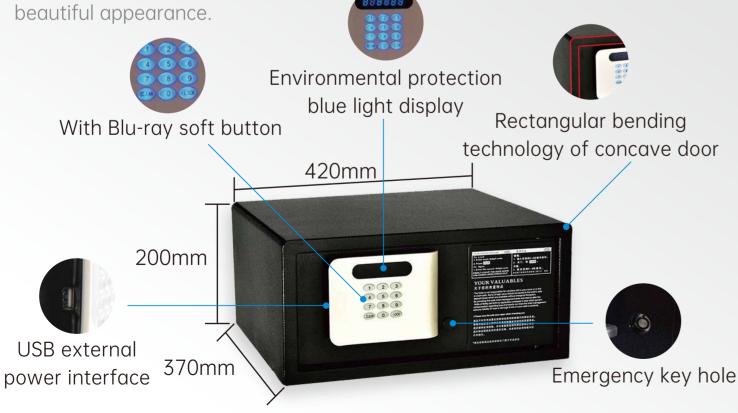

GC-4220-A

Features



▶ Product Dimension(mm): 420*200*370(WDH) ▷ Packing Dimension(mm): 460*260*410(WDH)

Net Weight(kg): 10 ▶ Gross Weight(kg): 11 Door thickness(mm): 4 ▶ Box thickness(mm): 2



◆ Feature: Square electronic panel, rightangle bending green blue display soft rubber button and key with blue light.

GC-4220-D

Features



▶ Product Dimension(mm): 420*200*370(WDH)

▶ Packing Dimension(mm): 460*260*410(WDH)

▶ Net Weight(kg): 10 ▷ Gross Weight(kg): 11 Door thickness(mm): 4 ▶ Box thickness(mm): 2

▷ Colour: Black,Pale

◆ Feature: Long circle type hand touch screen induction panel, right angle bending green blue light display, soft glue button and key with blue light.

GC right angle concave door series



GC right angle concave door series

GC-4220-E

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- Packing Dimension(mm): 460*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- Colour: Black,Pale



 Feature: Circular electronic panel,right angle bending classic red light digital display,special price red.

GC-4220-F

Features



- ▶ Product Dimension(mm): 450*200*370(WDH)
- Packing Dimension(mm): 490*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- Colour: Black,Pale



◆ Feature: Round hand touch screen induction panel, right angle bending green blue light display, soft glue button and key with blue light.

GC-4220-P

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- ▷ Packing Dimension(mm): 460*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- Box thickness(mm): 2Colour: Black,Pale



◆ Feature: Square electronic panel, right angle bending green blue display soft rubber button and key with blue light.

GC-4220-Q

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- Packing Dimension(mm): 460*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ▶ Box thickness(mm): 2
- ▷ Colour: Black,Pale



◆ Feature: Conical garden electronic panel, right angle bending classic red light digital display, special price red.

GC right angle concave door series



GC right angle concave door series

GC-4220-R

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- ▶ Packing Dimension(mm): 460*260*410(WDH)
- Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- Box thickness(mm): 2
- Colour: Black,Pale



◆ Feature: With handle, PVC glue key, right angle bending, classic red light

digital display.

GC-4220-S

Features



- ▶ Product Dimension(mm): 450*200*370(WDH) Packing Dimension(mm): 490*260*410(WDH)
- ▶ Net Weight(kg): 11
- ▶ Gross Weight(kg): 12
- Door thickness(mm): 4
- ▶ Box thickness(mm): 2
- Colour: Black



◆ Feature: Wide size, large garden electronic panel, right angle bending green Blu ray display soft rubber button and key with blue light.

GC-4220-T

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- ▶ Packing Dimension(mm): 460*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▶ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- Colour: Black,Pale



◆ Feature: Square electronic panel, rightangle bending green blue display soft rubber button and key with blue light.

GC-4220-Y

Features



- ▶ Product Dimension(mm): 420*200*370(WDH)
- ▶ Packing Dimension(mm): 460*260*410(WDH)
- Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- Colour: Black,Pale



◆ Feature: Circular electronic panel, right angle bending green blue display soft rubber button and key with blue light.




GS round corner flat door series



Round corner flat door design. It adopts imported laser cutting technology, integrated molding, perfect arc, larger use capacity, more safe and reliable anti-theft.

Function configuration

LCD screen, acrylic electronic key panel
Automatic electronic lock
3-6 guest password unpacking
Unpacking the master password, unpacking the key
Handheld decoder out of the box
Wrong password lock
Unpacking records inquiry
17-inch laptop can be stored

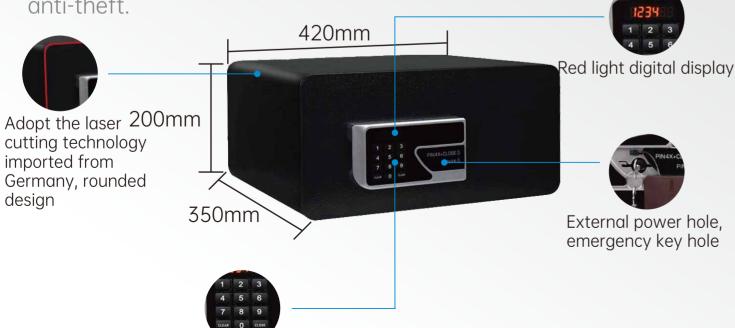

Plastic buttons

GS-4220-S





Features

- Product Dimension(mm): 420*200*350(WDH)
- Packing Dimension(mm):460*260*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- ▷ Colour: Black

characteristic

- Automatic door opening
- ▶ LED lighting in the box
- ▷ Blu-ray button
- ▶ Red light digital display
- Mechanical key to open the door
- ▶ Mifare card + secret card door open
- Master password card door
- ▷ 3-6 guest password to open the door
- ▶ Handheld machine to open the door
- Unpacking records inquiry
- Wrong password lock





GS round corner flat door series

GS-4220-J





Features

Environmental protection blue light display





Touch the temperature-sensitive blue light button

characteristic

- Product Dimension(mm): 420*200*350(WDH)
- Packing Dimension(mm): 460*240*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- ▷ Colour: Black

- Using black crystal tempered glass panel
- Dual alarm system
- ▶ Touch screen panel
- Automatic door opening
- Done-piece all-steel box
- Solid steel column lock bolt
- Large capacity

GS-4220-CT(Drawer)





Environmental protection blue light display



Touch the temperature-sensitive blue light button

Features

- ▶ Product Dimension(mm): 450*200*400(WDH)
- Packing Dimension(mm): 460*240*410(WDH)
- ▶ Net Weight(kg): 10
- ▷ Gross Weight(kg): 11
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 2
- Colour: Black

characteristic

- Using black crystal tempered glass panel
- Dual alarm system
- ▶ Touch screen panel
- Automatic door opening
- ▷ One-piece all-steel box
- ▷ Solid steel column lock bolt
- ▶ Large capacity



GS round corner flat door series

Features Product Dimension(mm): 420*200*350(WDH) Packing Dimension(mm): 460*260*390(WDH) Net Weight(kg): 11 Gross Weight(kg): 12 Door thickness(mm): 4 Box thickness(mm): 2 Colour: Black,Pale Feature: The circular electronic lock is connected with the cabinet. The waterproof PVC button indicator

	displays (red, yellow, green three lights).
GS-4220-B	Features
	 Product Dimension(mm): 420*200*350(WDH) Packing Dimension(mm): 460*260*390(WDH) Net Weight(kg): 11 Gross Weight(kg): 12 Door thickness(mm): 4 Box thickness(mm): 2 Colour: Black,Pale
NOSTRUCTON STATE OF THE PROPERTY OF THE PROPE	◆ Feature:Waterproof PVC glue film button red light LED digital display.



Features

▶ Product Dimension(mm): 420*200*350(WDH)▶ Packing Dimension(mm): 460*260*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4Box thickness(mm): 2

Colour: Black,Pale



◆ Feature: Garden type electronic lock white digital button red LED digital display.

GS-4220-H

Features



▶ Product Dimension(mm): 420*200*350(WDH)

▶ Packing Dimension(mm): 460*260*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

⊳ Box thickness(mm): 2

Colour: Black,Pale



◆ Feature: Garden with silver edge decoration electronic lock, with frame door design, red LED digital display.



CS top door series



Function configuration

LCD screen, acrylic electronic key panel. Automatic electronic lock.

3-6 guest password unpacking. Unpacking the master password, unpacking the key.

Handheld decoder out of the box.

Wrong password lock.

Unpacking records inquiry.

17-inch laptop can be stored.



Hydraulic strut



16mm cylindrical solid lock bolt

CS top door series



CS top door series

CS-TA

Features



▶ Product Dimension(mm): 410*170*350(WDH)

▶ Packing Dimension(mm): 450*210*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

Box thickness(mm): 2Colour: Black,Pale



◆ Feature: Rectangular electronic lock waterproof PVC adhesiveMembrane key red LED digital display, flip Type safe, electric automatic door.

CS-TB

Features



▶ Product Dimension(mm): 410*170*350(WDH)

▶ Packing Dimension(mm): 450*210*390(WDH)

Net Weight(kg): 11

⊳ Gross Weight(kg): 12

Door thickness(mm): 4

⊳ Box thickness(mm): 2

Colour: Black,Pale



◆ Feature: Circular electronic lock waterproof PVC film key red LED digital display, flip safe, electric automatic door。

CS-TC

Features



▶ Product Dimension(mm): 410*170*350(WDH)

▶ Packing Dimension(mm): 450*210*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

▷ Box thickness(mm): 2

Colour: Black,Pale



◆ Feature: Rectangular electronic lock waterproof PVC adhesiveMembrane key red LED digital display, flip Type safe, electric automatic door.

CS-TD

Features



▶ Product Dimension(mm): 410*170*350(WDH)

▶ Packing Dimension(mm): 450*210*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

⊳ Box thickness(mm): 2

Colour: Black,Pale



 Feature: Circular electronic lock waterproof PVC film key red LED digital display, flip safe, electric automatic door.

CS top door series

CS-TE

Features



▶ Product Dimension(mm): 410*150*350(WDH)

▶ Packing Dimension(mm): 450*210*390(WDH)

▶ Net Weight(kg): 11

⊳ Gross Weight(kg): 12

▷ Door thickness(mm): 4

▶ Box thickness(mm): 2

▷ Colour: Black,Pale

◆ Feature: Circular electronic lock waterproof PVC film key red LED digital display, flip safe, electric automatic door.

CS-TF

Features



▶ Product Dimension(mm): 410*150*350(WDH)

▶ Packing Dimension(mm): 440*210*390(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

⊳ Box thickness(mm): 2

▷ Colour: Black,Pale

◆ Feature: Circular electronic lock waterproof PVC film key red LED digital display, flip safe, electric automatic door。

CS-TG

Features



▶ Product Dimension(mm): 410*170*350(WDH)

▶ Packing Dimension(mm): 440*200*385(WDH)

▶ Net Weight(kg): 11

▷ Gross Weight(kg): 12

Door thickness(mm): 4

⊳ Box thickness(mm): 2

Colour: Black,Pale

◆ Feature:Rectangular electronic lock waterproof PVC adhesiveMembrane key red LED digital display, flip Type safe, electric automatic door.



GD-1935 series



GD-1935 series

GD-1935-Q

Features

- ▶ Product Dimension(mm): 355*190*260(WDH)
- ▶ Packing Dimension(mm): 405*260*325(WDH)
- ▶ Net Weight(kg): 6.92
- ▷ Gross Weight(kg): 7.9
- Door thickness(mm): 4Box thickness(mm): 1.5
- Colour: Black,Pale



 Feature:Rectangular electronic lock waterproof PVC film key red LED digital display, electric automatic door opening.

GD-1935-W



Features

- ▶ Product Dimension(mm): 355*190*260(WDH)
- ▶ Packing Dimension(mm): 405*260*325(WDH)
- ▶ Net Weight(kg): 6.9
- ⊳ Gross Weight(kg): 7.9
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 1.5
- Colour: Black,Pale



 Feature: Rectangular electronic lock waterproof PVC film key red LED digital display, electric automatic door opening.

GD-1935-E



Features

- ▶ Product Dimension(mm): 355*190*260(WDH)
- Packing Dimension(mm): 405*260*325(WDH)
- ▶ Net Weight(kg): 6.92
- ⊳ Gross Weight(kg): 7.9
- Door thickness(mm): 4
- ⊳ Box thickness(mm): 1.5
- Colour: Black,Pale



◆ Feature: Rectangular electronic lock waterproof PVC film key red LED digital display, electric automatic door opening.

GD-1935-R



Features

- ▶ Product Dimension(mm): 355*190*260(WDH)
- ▷ Packing Dimension(mm): 405*260*325(WDH)
- ▶ Net Weight(kg): 6.92
- ▷ Gross Weight(kg): 7.9
- Door thickness(mm): 4 □
- ⊳ Box thickness(mm): 1.5
- ▷ Colour: Black,Pale



◆ Feature:Rectangular electronic lock waterproof PVC adhesiveMembrane key red LED digital display, flip Type safe, electric automatic door.

GD-1935 series

GD-1935-TP

Features

- ▶ Product Dimension(mm): 362*457*165(WDH)▶ Packing Dimension(mm): 395*490*220(WDH)
- Net Weight(kg): 6.92Gross Weight(kg): 7.9
- Door thickness(mm): 4Box thickness(mm): 1.5
- Colour: Black,Pale
- ◆ Feature:Wall-mounted cabinet, round electronic lock waterproof,
 PVC film key blue light LED digital display, electric automatic door opening.



Safe hotel intelligent management system (optional for GC \ CS)

1.CEU also called "decoder" or "handheld device", reading the opening record through the USB interface connected to the safe, and then use the USB connect the computer to download the data, which can scan, query and print the latest 100 time and method of opening.


- 2.CEU can set password to open the door, can set time, and can also be used as an external power supply to open the door in case the battery in the safe runs out.
- 3. The intelligent safe records every operation of the hotel guests, service staff and manager to the safe. These operation information are stored in the safe chip, which is unique and cannot be changed.

Manage password cracking







The password sends a record allery



Please put the safe in the proper position and mark the drilling hole with a pen.



The electric drill is prepared in advance, and the mounting hole with a 1mm bit is drilled to a depth of about 55mm.



Insert the plastic expansion pipe into the drilled hole, place the safe, screw in the self-tapping screw and tighten the screw with a wrench to complete the installation.